DIERYA

DK63

PRODUCT USER MANUAL

Specifications

Product Name: DK63

Bluetooth: DIERYA DK63

Backlight: RGB

Material : Case-ABS, Keycaps-ABS

Battery: 3000 mAh

Optional Mode: Wired / Bluetooth / 2.4G

Key: 63 Keys

Interface Type: Type-C / Bluetooth / 2.4G

Size: 292.8×101×42mm

Product Weight: 640g±20g

Package Included: Keyboard、Type-C Cable、Keycaps Puller 、User Manual、2.4G Dongle

If you have any problems or need assistence related to this product, please feel free to ask our customer service for help.
Email:customer@Kemove.com

Instruction for Using Fn Key

Bluetooth

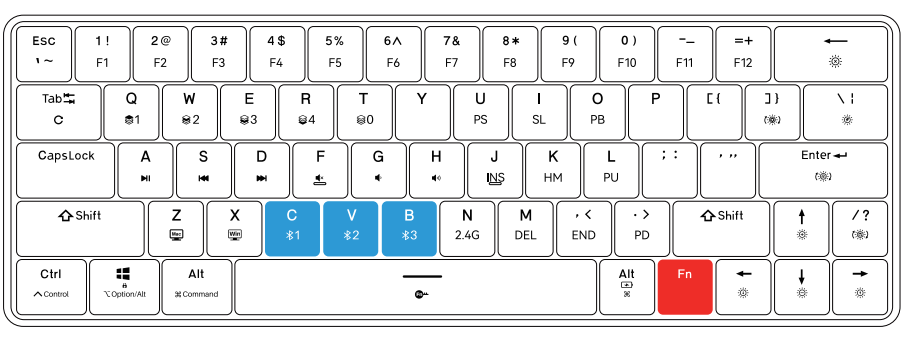

Fn+C =BT 1 Fn+V =BT 2 Fn+B =BT 3

① Set the switch of the back to bluetooth mode.

② Long press Fn+C/V/B, the light of C/V/B key blinks to turn on the Bluetooth pairing, and search "DIERYA DK63" to complete the connection pairing.

③ Short press Fn+C/V/B to switch to the connected Bluetooth device 1/2/3.

Instruction for Using Fn Key

Profile & Function

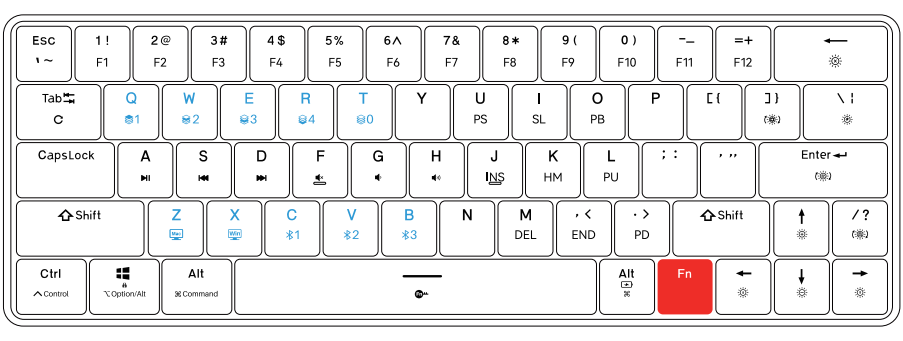

Fn: check current configuration layer, system layout and Bluetooth channel.

1、Fn key pressed ,the lighting key(Q/W/E/R/T) corresponded to the current configuration layer .

2、Fn key pressed, the lighting key (Z/X) corresponded to the current system.

3、Fn key pressed, the lighting key(C/V/B) corresponded to the current channel of Bluetooth.

Instruction for Using Fn Key

Profile & Function

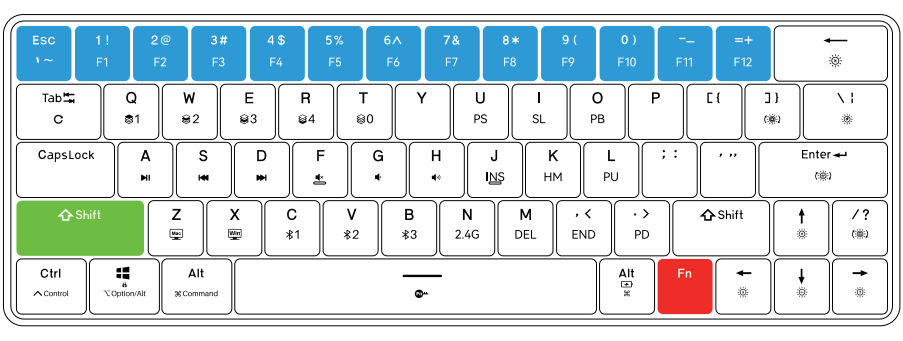

Fn+1 : F1 Fn+2 : F2 Fn+3 : F3 Fn+Esc : `

Fn+4 : F4 Fn+5 : F5 Fn+6 : F6 Fn+Shift+Esc : ~

Fn+7 : F7 Fn+8 : F8 Fn+9 : F9

Fn+0 : F10 Fn+- _ : F11 Fn+= + : F12

Instruction for Using Fn Key

Profile & Function

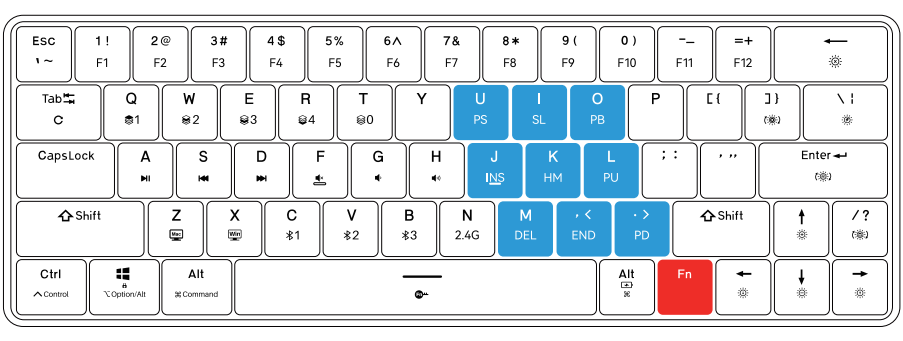

Fn+U : PrtSc Fn+I : ScrLK Fn+O : Pause

Fn+J : Ins Fn+K : Home Fn+L : Pgup

Fn+M : Del Fn+, < : End Fn+. > : PgDn

Instruction for Using Fn Key

Profile & Function

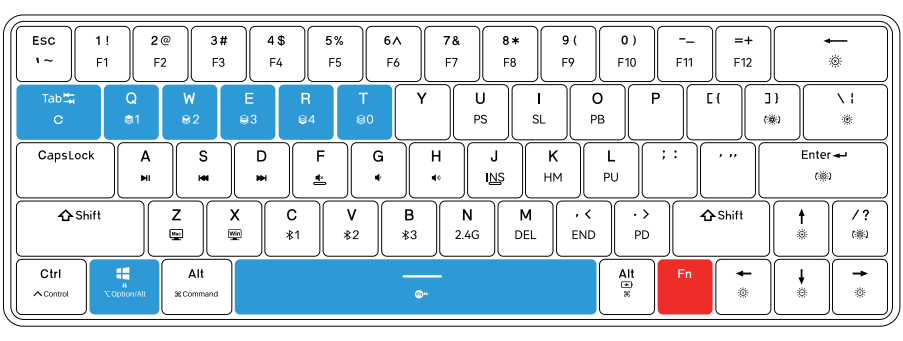

Fn+Q : Profile 1 Fn+W : Profile 2 Fn+E : Profile 3 Fn+R : Profile 4

Fn+T : Profile 0

Fn+Tab : Press long until light of the keyboard blinks, the keyboard reset to the factory default settings.

Fn+Win : Win key locked / unlocked (Win key light change to white when locked, it follows current light mode when Win key is unlocked.)

Fn+Spacebar : Fn key locked/unlocked (Fn key flashes red light when locked, it follows current light mode when Fn key is unlocked.)

Instruction for Using Fn Key

Multi-Media

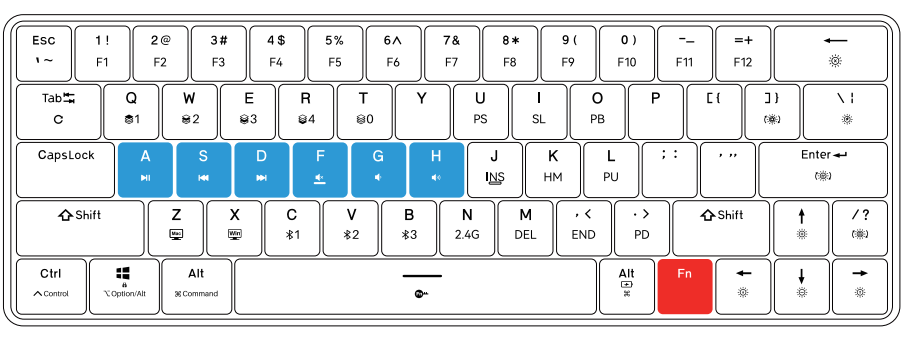

Fn+A : Play / Pause Fn+S : Previous song Fn+D : Next song

Fn+F : Mute Fn+G : Volume down Fn+H : Volume up

Instruction for Using Fn Key

Lighting

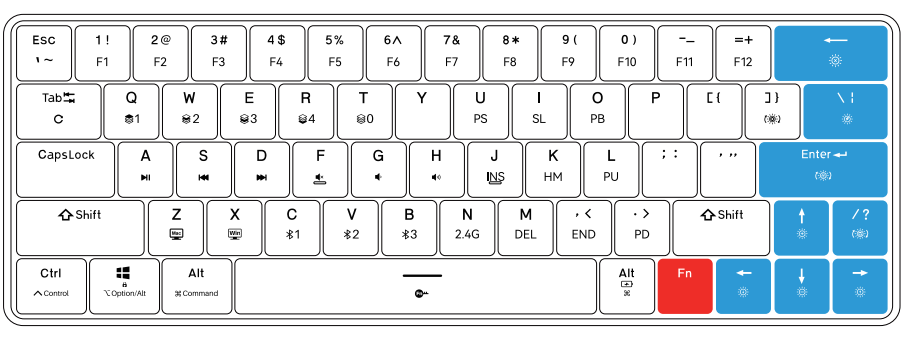

Fn+Backspace : Turn the light on / off Fn+] } : Change custom lighting Fn+\ | : Power saving mode

Fn+Enter : Switch light colours Fn+/ ?: Switch light modes Fn+ ↑ : Increase light brightness

Fn+ ↓ : Weaken light brightness Fn+ ← : Speed down light effect Fn+ → : Speed up light effect

Toggle switch & Indicator

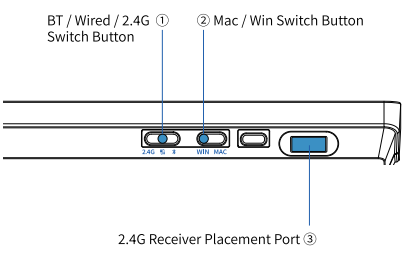

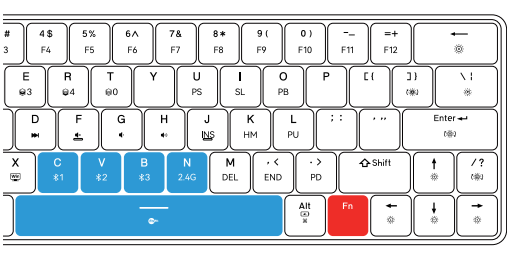

BT Mode

The switch set to BT mode, connect keyboard to BT device to use.

2.4G mode

The switch set to 2.4G mode, plug the receiver into computer to use.

Wired mode

The switch set to wired mode, plug the cable into computer to use.

Fn+N : 2.4G mode

- Turn on 2.4G mode

Fn+right Alt : Battery status:

- 0%~20% The spacebar key flashes red light
- 20%~80% The spacebar key flashes green light
- 80%~100% The spacebar key flashes blue light

Fn+C/V/B :

Bluetooth mode

- Turn on BT1 mode
- Turn on BT2 mode
- Turn on BT3 mode