



K87-1980
PRODUCT USER MANUAL

Specifications

Product Name: K87-1980

Bluetooth: KEMOVE K87-1980

Backlight: RGB

Material : Case-ABS, Keycaps-PBT

Battery: 4000mAh

Optional Mode: Wired / Bluetooth / 2.4G

Key: 87 Keys

Interface Type: Type-C / Bluetooth / 2.4G

Size: 365×139×24mm


Product Weight: 1289g±10g

Package Included: Keyboard、Type-C Cable、Keycaps Puller 、 User Manual、 2.4G Dongle

If you have any problems or need assistance related to this product, please feel free to ask our customer service for help.
Email: customer@kemove.com

Instruction for using FN key

Auxiliary Key

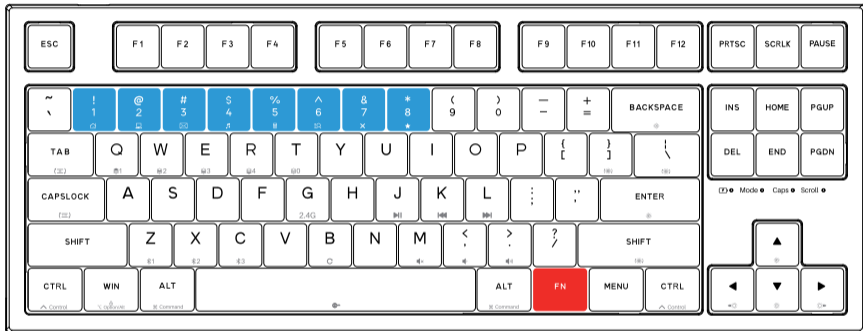

FN+1: Home page

FN+2: My computer

FN+3: E-Mail

FN+4: Multimedia player

FN+5: Calculator


FN+6: Search

FN+7: Close the webpage

FN+8: Bookmark webpage

Instruction for using FN key

Bluetooth

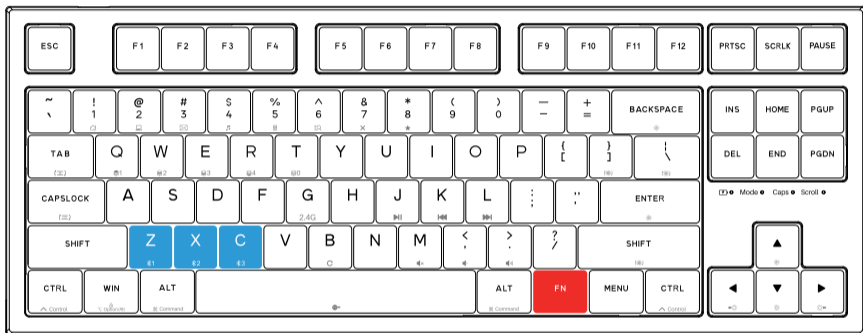

FN+Z=BT1


FN+X=BT2

FN+C=BT3

- ① Set the switch in back of the keyboard to the Bluetooth mode. (The green light of the mode indicator stays on for 5 seconds)
- ② Long press **FN+Z/X/C**, to activate BT pairing mode, Z/X/C light flashes, and search for "KEMOVE K87-1980" on the device to complete the connection pairing.
- ③ Short press **FN+Z/X/C** to switch to the connected BT device 1/2/3.

Instruction for using FN key

Profile & Function

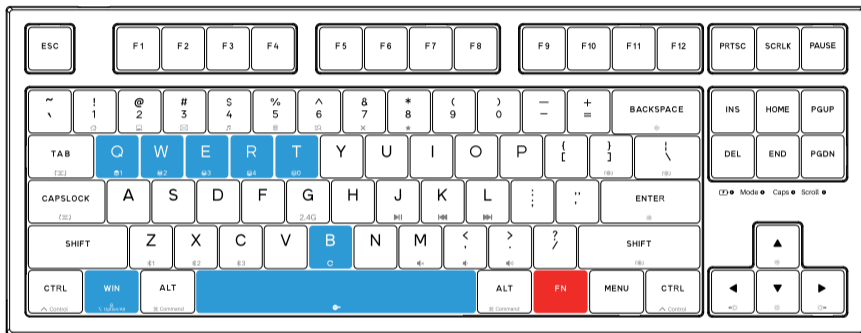

FN+Q : Profile 1 FN+W : Profile 2 FN+E : Profile 3 FN+R : Profile 4 FN+T : Profile 0


FN+B : Press long until light of the keyboard blinks, the keyboard reset to the factory default settings.

FN+WIN : WIN key locked / unlocked (WIN key keeps flashing white light when locked.)

FN+Spacebar : FN key locked /unlocked (When FN key is locked,it flashes red light. In this state, the multimedia key can be used separately.)

Instruction for using FN key

Multi-Media

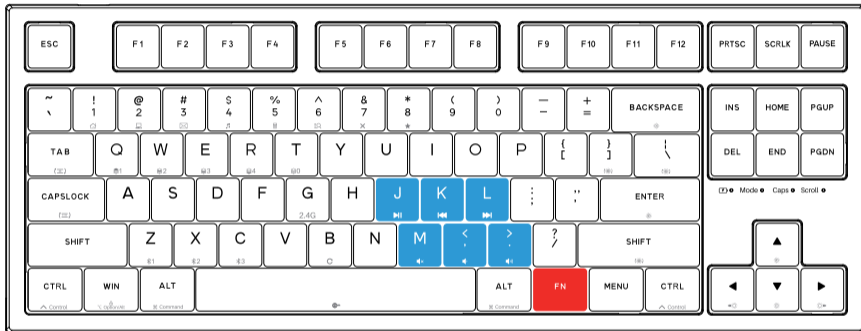

FN+J : Play / Pause

FN+K : Previous song

FN+L : Next song



FN+M : Mute

FN+, < : Volume down

FN+, > : Volume up

Instruction for using FN key

Lighting

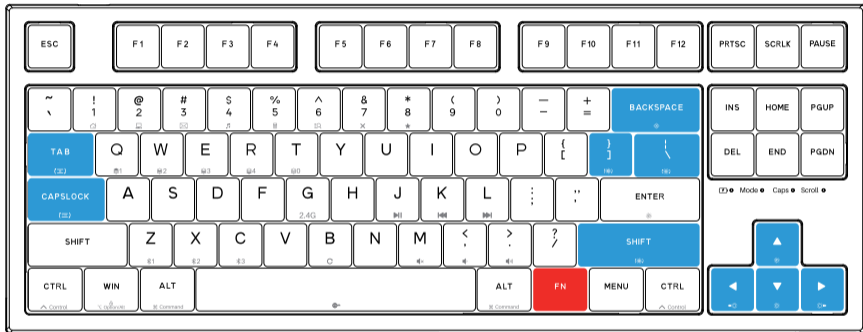

FN+Tab : Switch light piping mode

FN+Capslock : Switch light piping color

FN+↑ : Enhance light brightness

FN+↓ : Weaken light brightness

FN+← : Speed down light effect

FN+→ : Speed up light effect



FN+Backspace : Turn the light on / off

FN+] : Switch to the customized lighting effect

FN+↖ : Switch lighting mode

FN+Right Shift : Change the color of light

Toggle switch & Indicator

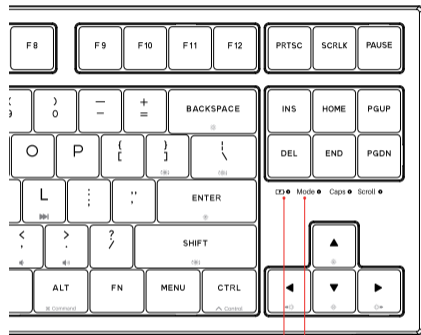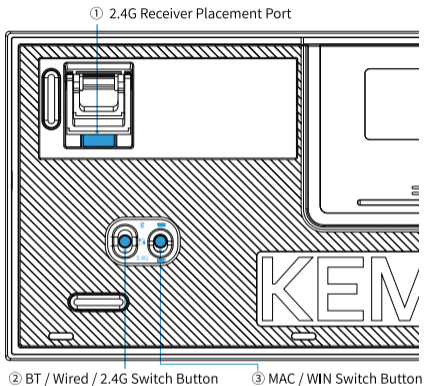

Battery Indicator
In Wireless mode

Mode Indicator

BT Mode: The switch set to BT mode, connect keyboard to BT device to use.

2.4G mode: The switch set to 2.4G mode, plug the receiver into computer to use.

Wired mode: The switch set to wired mode, plug the cable into computer to use.

● 0%~20%

● 20%~80%

● 80%~100%

● 2.4G mode connected, red light on for 5s.

● Wired mode connected, blue light on for 5s.

● BT mode connected, green light on for 5s.