



**KEMOVE**

**K68**

PRODUCT USER MANUAL

# Specifications

**Product Name:** K68

**Backlight:** RGB

**Battery:** 3000 mAh

**Key:** 68 Keys

**Size:** 330 mm × 119 mm × 30 mm

Package Included: Keyboard、Type-C Cable、Keycaps  
Puller 、User Manual、 2.4G Dongle

**Bluetooth:** KEMOVE K68

**Material:** Case-ABS, Keycaps-PBT

**Optional Mode:** Wired / Bluetooth / 2.4G

**Interface Type:** Type-C / Bluetooth / 2.4G


**Product Weight:** 760g ± 20g

If you have any problems or need assistance related to this product, please feel free to ask our customer service for help.

**Email:** [customer@Kemove.com](mailto:customer@Kemove.com)

# Instruction for using Fn key

## Auxiliary Key

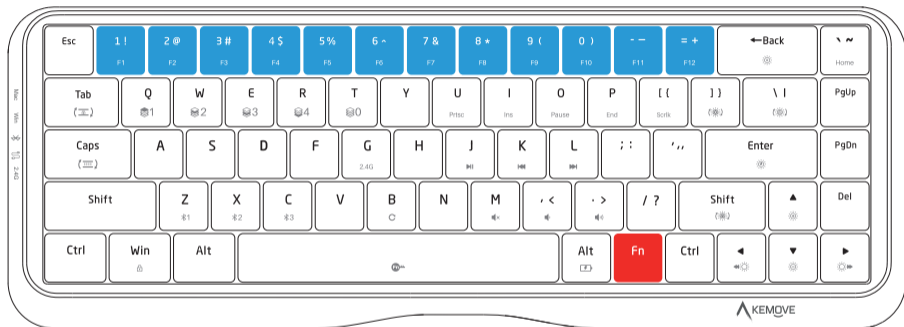

Fn+1 : F1

Fn+5 : F5

Fn+9 : F9

Fn+2 : F2

Fn+6 : F6

Fn+0 : F10

Fn+3 : F3

Fn+7 : F7

Fn+\_ : F11


Fn+4 : F4

Fn+8 : F8

Fn++ : F12

# Instruction for using Fn key

## Profile & Bluetooth

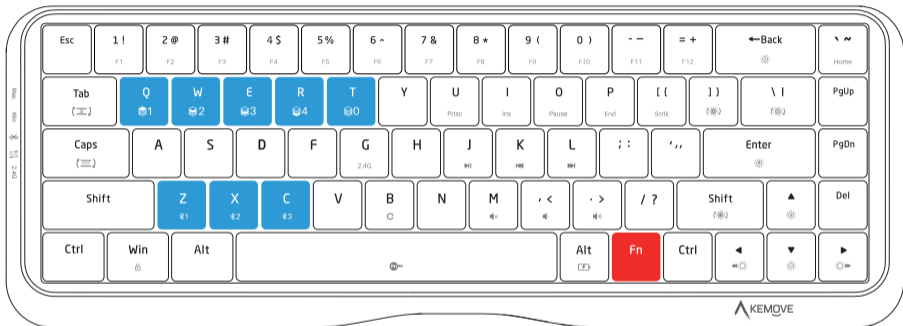

**Fn+Q** : Profile 1

**Fn+W** : Profile 2

**Fn+E** : Profile 3

**Fn+R** : Profile 4

**Fn+T** : Profile 0

**Fn+Z** : BT 1

**Fn+X** : BT 2

**Fn+C** : BT 3


① Set the switch in side of the keyboard to the Bluetooth mode.

② Long press **Fn+Z/X/C**, to activate BT pairing mode, Z/X/C light flashes, Search for "KEMOVE K68" on the device to complete the connection pairing.

③ Short press **Fn+Z/X/C**, switch to the connected BT device 1/2/3.

# Instruction for using Fn key

## Function

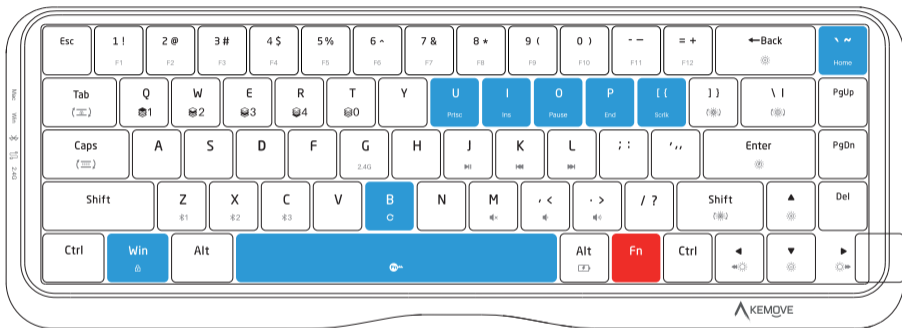

**Fn+~** : Home      **Fn+U** : Print Screen      **Fn+I** : Insert      **Fn+O** : Pause      **Fn+P** : End      **Fn+[** : Scroll lock


**Fn+B** : Press long until light of the keyboard blinks, the keyboard reset to the factory default settings.

**Fn+Win** : Win key locked / unlocked (Win key keeps flashing red light when locked.)

**Fn+Spacebar** : Fn key locked /unlocked (When Fn key is locked, it flashes red light. In this state, the multimedia key can be used separately.)

# Instruction for using Fn key

## Multi-Media

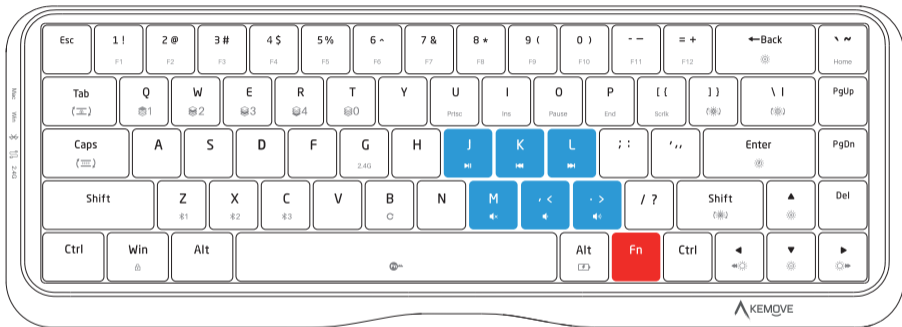

**Fn+J** : Play / Pause

**Fn+M** : Mute

**Fn+K** : Previous song



**Fn+, <** : Volume down

**Fn+L** : Next song

**Fn+, >** : Volume up

# Instruction for using Fn key

## Lighting

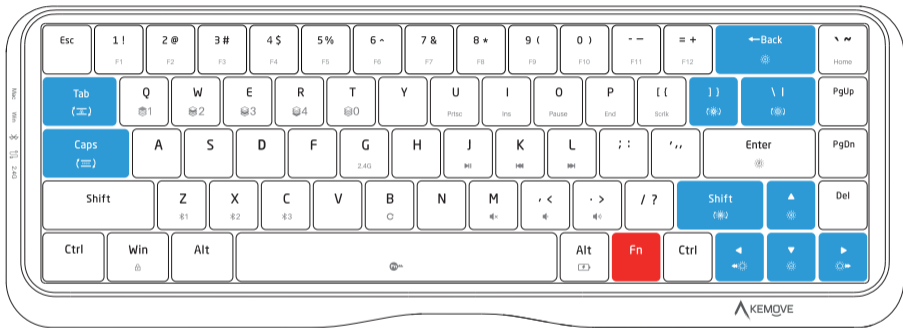

**Fn+Tab** : Switch light piping color

**Fn+Capslock** : Switch light piping mode

**Fn+↑** : Increase light brightness

**Fn+↓** : Weaken light brightness

**Fn+←** : Speed down light effect

**Fn+→** : Speed up light effect


**Fn+Backspace** : Turn the light on / off

**Fn+]} :** Switch to the customized lighting effect

**Fn+| :** Switch lighting mode

**Fn+Right Shift** : Change the color of light

# Toggle switch & Indicator



①

Mac / Win Switch  
Button


②

BT / Wired / 2.4G  
Switch Button

**BT Mode:** The switch set to BT mode, connect keyboard to BT device to use.

**2.4G Mode:** The switch set to 2.4G mode, plug the receiver into computer to use.

**Wired mode:** The switch set to wired mode, plug the cable into computer to use.

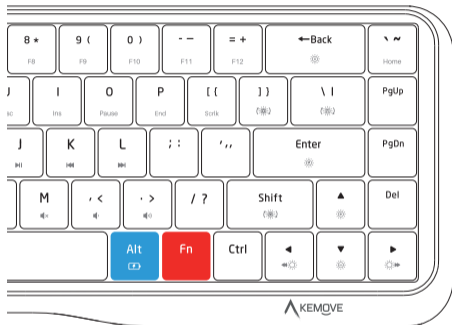

## In wired mode

**Fn+Right Alt** : Display power

- Charging
- Fully Charged

## In Bluetooth mode

**Fn+Right Alt** : Display power

- 0%~20%
- 20%~50%
- 50%~95%
- 95%~100%